



**Gemini 2** 8 338 1.1  
 Wandleuchten 8 338 1.2  
 Wall luminaire 8 338 2.2  
 8 338 4.4  
 8 338 4.5  
 8 338 5.5  
 8 338 ... 20.

Schutzart - Protection IP 65  $t_a 25^\circ\text{C}$   
 Schutzklasse - Safety Class I



**MONTAGE  
 ANLEITUNG**  
 Mounting  
 instructions



WILLY MEYER & SOHN GMBH & CO.KG  
 LICHTTECHNISCHE SPEZIALFABRIK  
 Stemmessiepener Weg 5 • D-58675 Hemer


Wandleuchte mit Hochleistungs-LED,  
 8 x LED 2,5 Watt.

Wall luminaire with high performance LED,  
 8 x LED 2,5 Watts.

8 338 ... 20. ( 1-10 V )

**MONTAGEHINWEISE**


Anschluß der Leuchte nach VDE 0100.  
 Wandleuchte für ungeschützte Anlagen.  
 ⚠ Leuchte ist geeignet für Montage auf normal entflammablen Baustoffen.  
 Vor dem Öffnen der Leuchte Netzspannung trennen.  
 Gewindestift am Leuchtengehäuse so weit lösen, dass sich die Wanddose abnehmen läßt. Wanddose mit beiliegendem Befestigungsmaterial anbringen.  
 Dichtscheiben und Isolationskappen unter Schraubenköpfe montieren. Aus Gründen des Berührungsschutzes dürfen die Schrauben nicht ohne die Isolationskappen montiert werden. Schrauben mit 3,5 Nm anziehen. Hinweisschild "UNTEN" in der Wanddose beachten. Zuleitung 5 cm abmanteln und beiliegende Silikonschläuche über alle stromführenden Einzeladern ziehen. Achtung ! Mantelleitung darf max. 0,5 cm in die Anschlußdose ragen. Auf richtigen Sitz der Zuleitung in der Kabeltülle achten. Elektrischen Anschluss vornehmen. Schutzleiteranschluß muss an der Kopfkontaktklemme erfolgen. Beim Aufsetzen der Leuchte auf die Wanddose elektrische Verbindung durch Stecker herstellen. Gewindestift fest anziehen. Das Glas ist ein Einscheiben-Sicherheits-Hartglas.



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.


Leuchte	Gewicht	Windangriffsfläche
8 338 ...	1,2 kg	0,017 m <sup>2</sup>

In Strahlrichtung den Mindestabstand zu angestrahlten Flächen einhalten !



**MOUNTING INSTRUCTIONS**


Connect the light fitting in compliance with prevailing regulations in your country.  
 Luminaire for non-protected outdoor installation.  
 ⚠ Light fitting is suitable for mounting on normal inflammable surfaces.  
 Disconnect from power supply before opening light fitting.  
 Undo the set screw on the housing so far that the wall box can be removed.  
 Fix the wall box with the enclosed fixing parts; sheet gaskets and insulating caps under the screw heads.  
 These must not be removed for safety reasons. Tighten the screws with 3.5 Nm. See the information sign "bottom".  
 Push the power supply cable through the cable bushing, strip the sheathing off the last 5 cm of cable and slide the enclosed silicone sleeves over the ends of the individual wires.  
 Attention ! Do not insert more than 0,5 cm of sheathed cable into luminaire housing. Make sure that the cable sits properly in the gasket. Connect the wiring.  
 Connection of the grounded wire must be done at the head contact binder.  
 Put luminaire on wall box and arrange electrical connection by plug. Fix set screw tightly. The glass is tempered safety glass.




Luminaire may only be operated when all protective covers are in place.

Type	Weight	Projected area
8 338 ...	1,2 kg	0,017 m <sup>2</sup>

Ensure that the minimum spacing between luminaire and illuminated surface is observed.



**Anschlußschema 1-10 V**

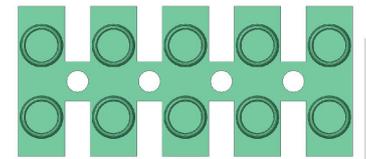

+ - ⊕ L N  
 1-10 V

