

Level Switch NP-2T DL

Product data sheet

Art. no. : 13180





Features

- Controls DALI light fittings with broadcast command.
- Does not require programming.
- Built-in power supply for DALI bus
- Dynamic lighting control.
- Supply voltage 230 VAC.
- 100% burn-in of fluorescent light fittings in 100 hours.
- Allows detector delay time to be set in addition to time in detector.

Inputs and outputs

- Output for DALI light fittings.
- Input for presence detector.
- Input for light sensor.
- Pushbutton input.
- 12 VDC supply for IR detectors.
- Relay output for driving contactors, where required.

Standard wiring

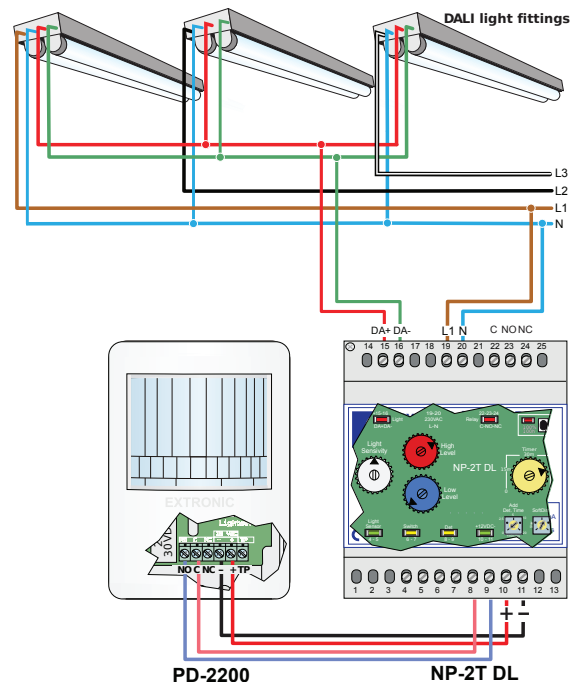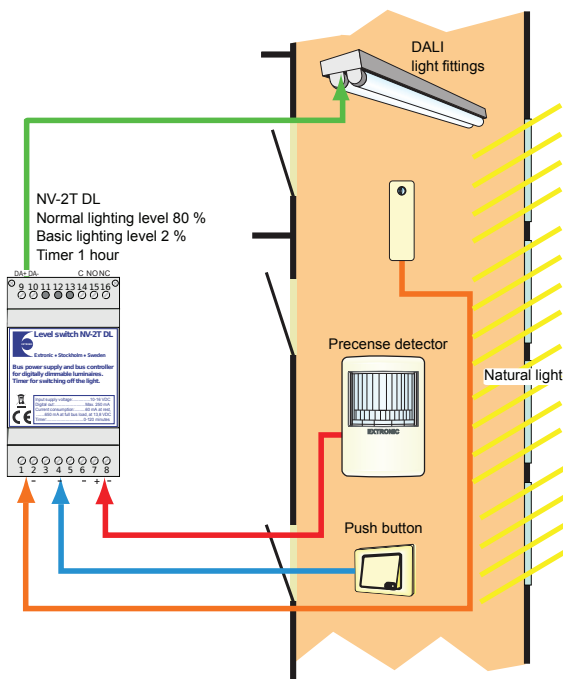

Dynamic light control with three levels

- Presence detection, normal lighting
- Timer, base lighting
- Standby mode, lighting switched off

Typical applications

- Corridors
- Offices
- Classrooms
- Stairways
- Indoor car parks

Technical specifications

Voltage:	230 VAC.
Power supply, DALI bus:	21 V, max. 200 mA.
Power supply, detectors:	12 V, max. 200 mA.
Number of light fittings:	Approx. 100 depending on type.
Relay:	Switching.
Switch-off delay:	0–120 minutes.
Dimensions (W x H x D):	72 x 92 x 76 mm (4 modules).