



SCMR0432

iCANdin - 4 Channel 32 Amp Feed Through Relay Controller

Key Features

- 4 x 32 Amp feed through relays
- Any phase on any input
- Mounts to standard Top Hat (TS35) DINrail
- Switches resistive, inductive and capacitive lighting loads
- Intelligent 'Built in' propagation delay for switching sequence 1-4
- Manual override of any channel
- Integral processor
- iLight network terminal connections
- Configuration stored in Non Volatile EEPROM
- Firmware storage in reflashable FLASH memory over iCAN network
- Configurable start up mode
- CE compliant to all relevant standards
- Designed and manufactured to ISO9001:2015 standards



Overview

This 4 channel feed through relay unit provides outstanding features and performance in a truly competitive and compact package. Each channel is rated for up to 32 amps and is designed to sit on load lines to switch heavy loads of all types.

With iLight network connectivity, it has the capability of being linked with a virtually limitless number of other products to build up to any size of system. This product is designed for projects where high power switching is required including metal halide and high pressure sodium lamps as well as non-lighting loads of any voltage up to 230VAC.



Powering Business Worldwide

Mechanical

Weight: 0.8kg

Operating temperature: +2°C to +50°C

Note: All enclosures must be adequately ventilated

Max storage temperature: +60°C

Humidity: +5 to 95% non-condensing


Environmental protection: IP20

Installation: Installation must be carried out by a suitably qualified electrician and installed in a suitable DINrail enclosure.

Software

For programming SCMR0432, Device Editor V2.11.1 is required (Packaged with iCANsoft V3.1.7 or later)

Dimensions

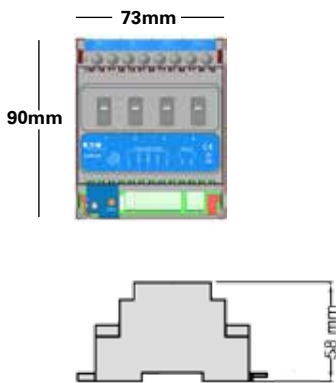

Electrical & Mechanical

Control: Via iLight network connection.

80mA quiescent current. Recommended: 200mA 15V DC Supply

Protection: Provided by installer.

To be installed in a suitable enclosure

Output channel current: Maximum 32A* at 40°C

(Total unit load not to exceed 64A)


Note: Fully loaded channels should be spaced every other channel to prevent heat buildup

Relay outputs: Volt free capable of switching inductive and resistive loads

Loads - maximum cable size: 1 x 10mm² per circuit

* 32A resistive per channel @ 40°C
20A capacitive per channel @ 40°C

Typical Schematic

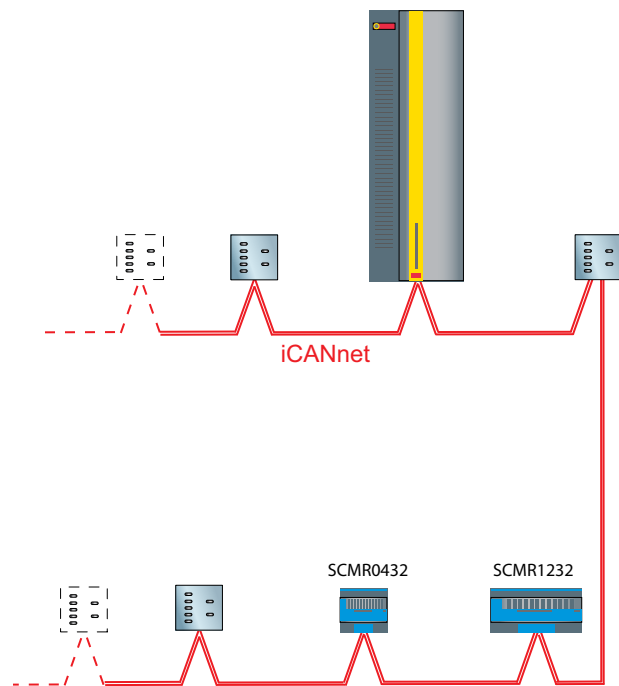

Contact your local Eaton office

T: +44 (0)1923 495495 F: +44 (0)1923 228796

E: enquiries@iLight.co.uk www.iLight.co.uk

Eaton Lighting Systems
20 Greenhill Crescent,
Watford Business Park,
Watford, Herts, WD18 8JA. UK
eatonlightingsystems.com

© 2018 Eaton
All Rights Reserved

Document No: SCMR0432 Rev3 0318

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

EATON

Powering Business Worldwide

CE

