

B.E.G. LUXOMAT[®] net ROUTER-DALISYS-REG

Description	Colour	Part number	EAN number
ROUTER-DALISYS-REG	white	92850	4007529928507



Accessory	Colour	Part number	EAN number
PS-DALISYS-USB-REG	white	92843	4007529928439

■ TECHNICAL DATA

Voltage:	5 V DC
Typ. power input:	max. 5W
Degree / class of protection:	IP20 / Class II / CE
Ambient temperature:	-25 °C to +50 °C
Housing:	Polyamide, UV-resistant


PRODUCT INFORMATION

- DALI router with integrated web server for DIN rail mounting
- 1 to 4 DALI lines (via USB and B.E.G. LUXOMAT[®]net PS-DALISYS-USB-REG)
- Up to 100 DALI routers per LAN --> up to 400 networked DALI lines
- Central management of parameters, addresses, groups and scenes for all networked DALI components
- Integrated real time clock and calendar function
- Expanded guided light function (across all DALI lines)
- DALI emergency light manager
- Email notification service (e.g. lamp fault or room occupancy)
- Can be operated via compatible web browser on any user device (smartphone, tablet, PC)
- Analysis and diagnosis tools for energy consumption and fault-finding



LUXOMAT[®] net ROUTER-DALISYS-REG

DIMENSIONS DRAWING

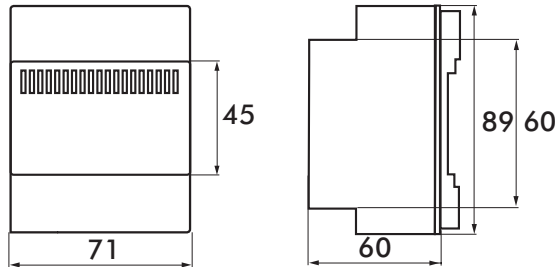

WIRING DIAGRAM

