


Spotlights BIT BMT




- Lighting technology LED
- For three-circuit track or surface mounting
- Surface mounted by means of ceiling jack for adapter
- Tilting and turning (360°/90°)
- With integral reflector SP, MFL, FL or WFL
- Connection data: 220-240 V, 50/60 Hz
- DALI and EASY-Lighting control system is possible
- Weight 0.8 kg
- Colors: white/anthracite/silver

IP20

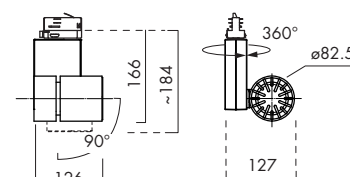

Photometric data	CRI Light colour	Lumen category	P _{system}	Efficiency	Reflector
	830	2000 lm	17 W	125 lm/W	SP MFL FL WFL
		3000 lm	29 W	107 lm/W	
		max. 3800 lm	38 W	100 lm/W	
840 927 Brilliant (930) = Best Color/Best White	Photometric data on request				

The photometric values are standard values and refer to the entire luminaire.
In the case of CRI ≥ 90 the efficiency is approx. 10-15 % lower.

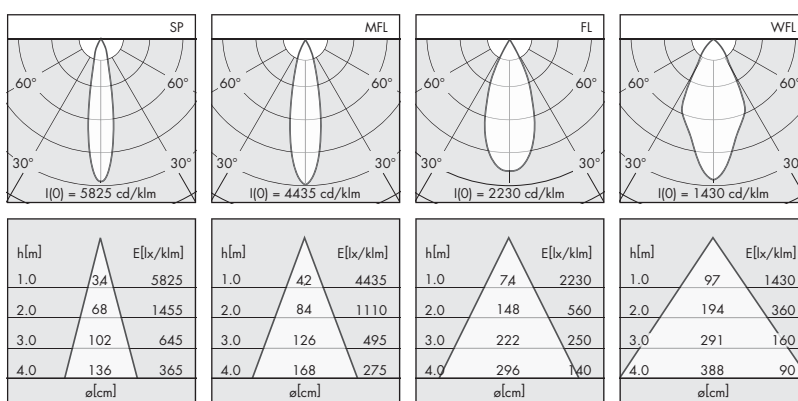

Optional accessories

Interchangeable reflector

SP
MFL
FL
WFL

Article number

17 HLB 610
17 HLB 410
17 HLB 210
17 HLB 110

Ceiling jack for adapter

white
black

16 NK 70319002
16 NK 70319003

Recessed ceiling jack

white
black

16 NK 70360002
16 NK 70360003