

Pelée surface mounted

Design: Cubo Architects



FOCUS-LIGHTING

Find our sales partner in your country under Contacts at www.focus-lighting.dk


Pelée 385 surface mounted

Design: Cubo Architects



Luminaire

Material: Cast aluminium, coated white, black, or silver grey
 Shade: opalised or microprismatic acrylic
 Mounting: On ceiling
 Connection: max 2 cables, 5x1.5 mm² into 5-pole 2x2.5 mm² terminal block
 Classification: IP20, class I
 Weight: 3.3 kg
 Lamp type: LED

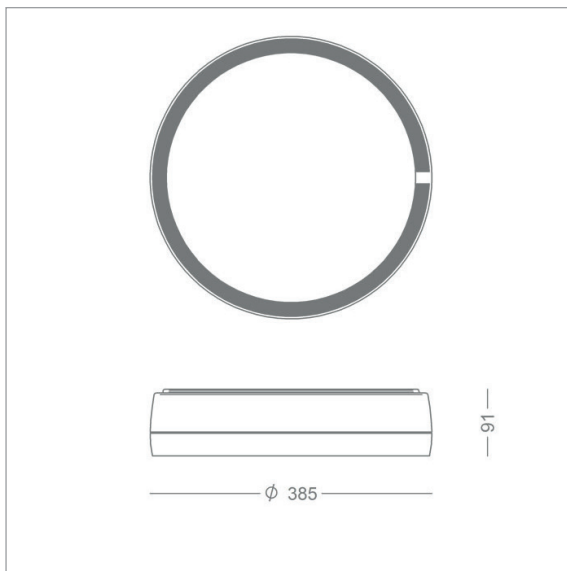

LED and driver

LED: 324 mm board
 Total consumption: 17, 23, or 33 W
 Service life: min 50,000 hours at ta 25°C L80B10
 Colour temperature: 2700, 3000, or 4000 Kelvin alt. 2700-6500 K tunable
 Colour rendering: min 90 Ra
 Colour accuracy: 3 Steps SDCM
 Drivers: Helvar, 500-700 mA, dimmable at extra cost TCI, 1050 mA, incl. Dali

Product codes

PELÉE 385 surface-mounted								
Item No.	Lamp type		Select colour, colour temperature etc. in the table below.					
2886-	17 W LED, 500 mA							
2887-	23 W LED, 700 mA							
	33 W LED, 1050 mA, incl. Dali							
Combine with:	Colour	Shade		Colour temperature			Dimmable driver	
	1 white	empty	opalised	927	2700 K, 90 Ra		empty	no dimming
	9 silver grey	M	microprismatic	930	3000 K, 90 Ra		D	Dali
	66 noir 900			940	4000 K, 90 Ra		V	1-10 V
				9WD	TW, Dali, 90 Ra			
Example Order code:	2886-1930D = Pelée 385 surface-mounted, 17 W, white, 3000 K 90 Ra, Dali							


Pelée 250 surface mounted

Design: Cubo Architects



Luminaire

Material: Cast aluminium, coated white, black, or silver grey
 Shade: opalised or microprismatic acrylic
 Mounting: On ceiling
 Connection: max 2 cables, 5x1.5 mm² into 5-pole 2x2.5 mm² terminal block
 Classification: IP20, class I
 Weight: 2.8 kg
 Lamp type: LED

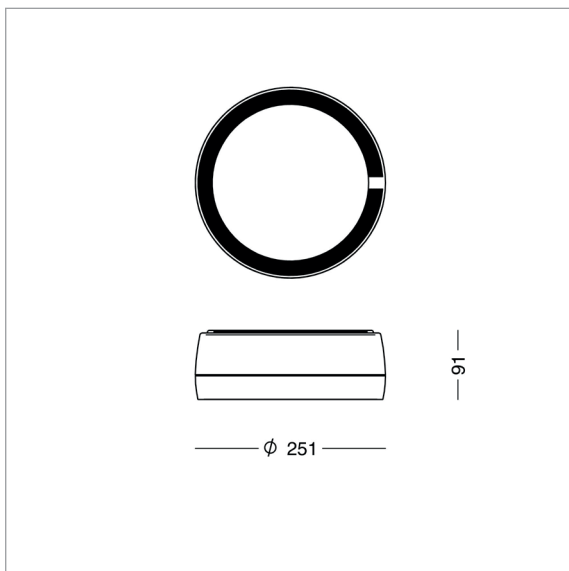

LED and driver

LED: 213 mm board
 Total consumption: 11 or 15 W
 Driver: 350-500 mA
 Service life: min 50,000 hours at ta 25°C L80B10
 Colour temperature: 2700, 3000, or 4000 Kelvin alt. 2700-6500 K tunable
 Colour rendering: min 90 Ra
 Colour accuracy: 3 Steps SDCM
 Output ratio: 68.5%

Product codes

PELÉE 250 surface-mounted							
Item No.	Lamp type	Select colour, colour temperature etc. in the table below.					
2880-	11 W LED, 350 mA						
2881-	15 W LED, 500 mA						
Combine with:	Colour	Shade		Colour temperature		Dimmable driver	
	1 white	empty	opalised	927	2700 K, 90 Ra	empty	no dimming
	9 silver grey	M	microprismatic	930	3000 K, 90 Ra	D	Dali
	66 noir 900			940	4000 K, 90 Ra	V	1-10 V
				9WD	TW, Dali, 90 Ra		
Example Order code:	2881-99WD = Pelée 250 surface-mounted, 15 W, grey metallic, tunable white, 90 Ra, Dali						