



## X-LINE LED CONNECTOR L

Surface mounted luminaires



Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver. X-LINE fittings are intended to be mounted on ceiling or pendants. The luminaires are adjusted to be linked together with specially designed links, which provide great freedom in arranging elements of the system as well as great functionality. In the family of X-LINE LED fittings modules of renowned brands are applied.



Manor house from the 17th century, Łodygowice


Pictograms:



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-LINE LED 1950	2022 / 2130	13	3000 / 4000	593/313 x 60 x 71
X-LINE LED 2600	2698 / 2840	17	3000 / 4000	593/593 x 60 x 71
X-LINE LED 3300	3309 / 3483	21	3000 / 4000	593/313 x 60 x 71
X-LINE LED 4400	4410 / 4644	28	3000 / 4000	593/593 x 60 x 71

Technical drawing:

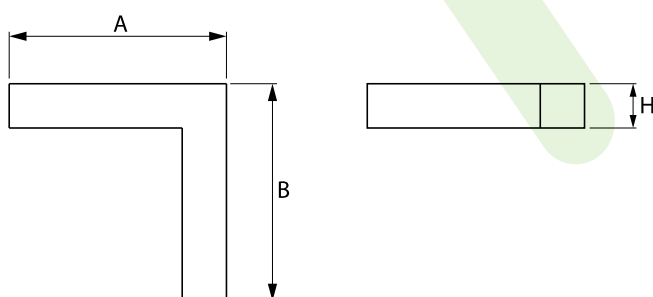

Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
CRI	>80
SDCM	3
Operating temperature range [°C]	5 ÷ 30
Driver	standard (E) DIM DALI (EDD) *

\* Variant to specify when ordering

Mechanical features:

Material	aluminum
Color	anodised aluminum
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA) PLX (PMMA opal)

Note: The power shown refers to the whole system (tolerance +/- 10%).

Specifications are subject to change. Pictures of the luminaires may differ from reality.  
Date of last update: 25-03-2020