




X-LINE G/K LED LINE

Recessed luminaires

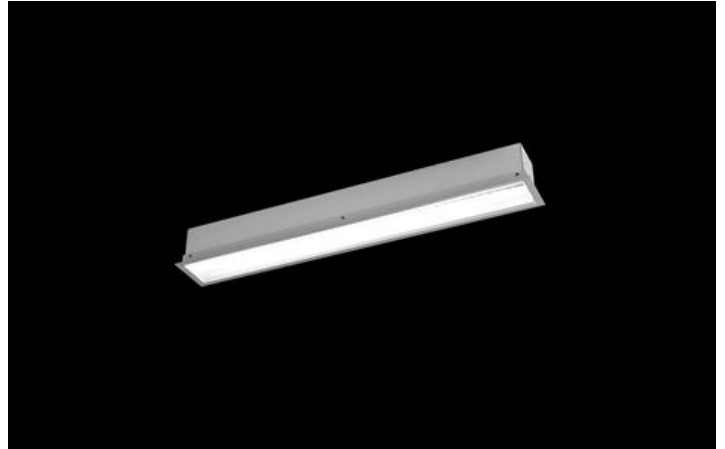

The group of X-line luminaires is made of aluminum profile with opal diffuser or micro-prismatic diffuser. The luminaires may be joined with special connectors providing great freedom in arranging elements of the system and its functionality.



"Artystyczny Żoliborz" residential, Warsaw

Pictograms:



Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm] |
|---------------------|------------------------|------------------------|-------------|-----------------------------------|
| X-LINE G/K LED 1300 | 1349 / 1420 | 9 | 3000 / 4000 | 572 x 80 x 136 / 562 x 80 x 136 |
| X-LINE G/K LED 2200 | 2205 / 2322 | 14 | 3000 / 4000 | 572 x 80 x 136 / 562 x 80 x 136 |
| X-LINE G/K LED 2600 | 2698 / 2840 | 17 | 3000 / 4000 | 1132 x 80 x 136 / 1122 x 80 x 136 |
| X-LINE G/K LED 3250 | 3370 / 3550 | 21 | 3000 / 4000 | 1412 x 80 x 136 / 1402 x 80 x 136 |
| X-LINE G/K LED 3900 | 4047 / 4260 | 26 | 3000 / 4000 | 1692 x 80 x 136 / 1682 x 80 x 136 |
| X-LINE G/K LED 4400 | 4410 / 4644 | 28 | 3000 / 4000 | 1132 x 80 x 136 / 1122 x 80 x 136 |
| X-LINE G/K LED 5200 | 5680 / 5396 | 34 | 4000 / 3000 | 2252 x 80 x 136 / 2242 x 80 x 136 |
| X-LINE G/K LED 5500 | 5515 / 5805 | 35 | 3000 / 4000 | 1412 x 80 x 136 / 1402 x 80 x 136 |
| X-LINE G/K LED 6600 | 6615 / 6966 | 42 | 3000 / 4000 | 1692 x 80 x 136 / 1682 x 80 x 136 |
| X-LINE G/K LED 8800 | 8820 / 9288 | 56 | 3000 / 4000 | 2252 x 80 x 136 / 2242 x 80 x 136 |

Technical drawing:



Light and electrical features:

| | |
|----------------------------------|----------------------------------|
| Light source | LED |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 100000 (1) / 147000 (2) |
| Lx/By | L80/B10 (1) / L70/B50 (2) |
| CRI | >80 |
| SDCM | 3 |
| Photobiological risk class | RG0 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | standard (E) DIM DALI (EDD) * |

* Variant to specify when ordering

Mechanical features:

| | |
|----------|--|
| Material | aluminum |
| Color | anodised aluminum |
| Diffuser | Micro-PRM (micro-prismatic diffuser PMMA) PLX (PMMA opal) |

Note: The power shown refers to the whole system (tolerance +/- 10%).

Specifications are subject to change. Pictures of the luminaires may differ from reality.
Date of last update: 25-03-2020