


# DATASHEET

## INFRALAN® I-B(ZN)BH 12G 50/125μ, OM3



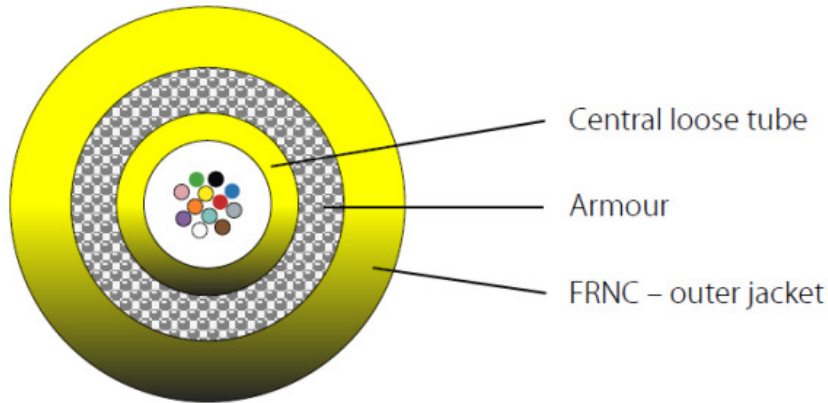

### Description

Fields of application:  
 For building connections  
 For campus cabling  
 For use in plastic pipe systems  
 For installation in cable ducts and on flatbeds

### Characteristics:

Easy to use construction  
 Gel-free cable construction for clean and fast assembly  
 Small dimensions  
 High laying stability  
 Fire behaviour tested and certified according to  
 Construction Products Regulation (see Euro fire class)

Cable diameter may vary

### General data

Application	Inside
Blow in	No
Cable metal free	yes
Cable silicone free	yes
With rodent protection	yes

### Mechanical characteristics

Crush resistance	1500 N/dm
------------------	-----------

### Cable construction

Fibre type	Multimode 50/125
------------	------------------

# DATASHEET

## INFRALAN® I-B(ZN)BH 12G 50/125μ, OM3

### Cable construction

Fibre category	OM3
Fiber marking	colour
Tube marking	colour
Strain relief	yes
Armouring	yes

### Cable sheath

Material outer sheath	LSZH
Euro Class	B2ca
Colour outer sheath	aqua
Flame retardant	acc. EN 60332-3-24
Halogen free	acc. EN 60754-1/2

### Environmental conditions

Temperature Range (Operation)	-25 – 60 °C
Temperature Range (Storage)	-25 – 70 °C
Temperature Range (Installation)	-5 – 50 °C

### Standards, approvals, certifications

Cabling standards	EN 50173-1;ISO/IEC 11801
Harmonized standard	EN 50575
Cable & Fiber	IEC 60794-2

### Available variants

Article no.	Title	VDE-Name	Construct	Cable Ø Weight		Bending radius	Tensile Force
56312.1OM3-CPR	INFRALAN® I-B(ZN)BH 12G 50/125μ, OM3,LSZH aqua CPR-B2CA	I-B(ZN)BH 12G 50/125μ	12G ( 1 x 12 ) Multimode OM3	6.5 mm	46 kg/km	130 mm	1500 N