


DATASHEET

INFRALAN® I-B(ZN)BH 12E 9/125μ, OS2



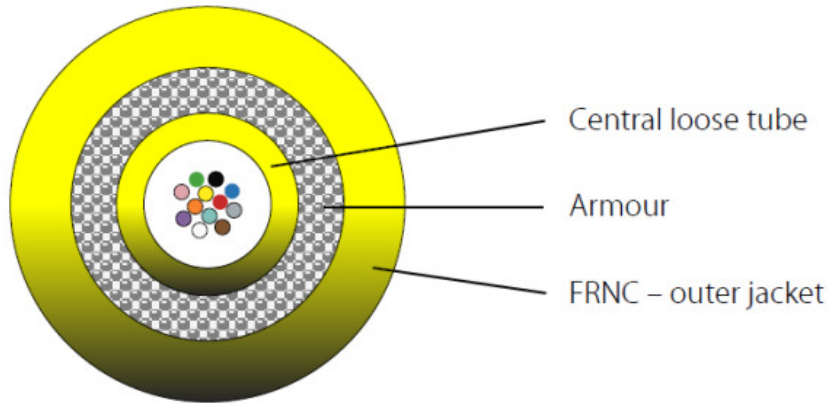

Description

Fields of application:
 For building connections
 For campus cabling
 For use in plastic pipe systems
 For installation in cable ducts and on flatbeds

Characteristics:

Easy to use construction
 Gel-free cable construction for clean and fast assembly
 Small dimensions
 High laying stability
 Fire behaviour tested and certified according to
 Construction Products Regulation(see Euro fire class)

Cable diameter may vary

General data

Application	Inside
Blow in	No
Cable metal free	yes
Cable silicone free	yes
With rodent protection	yes

Mechanical characteristics

Crush resistance	1500 N/dm
------------------	-----------

Cable construction

Fibre type	Singlemode
------------	------------

DATASHEET

INFRALAN® I-B(ZN)BH 12E 9/125μ, OS2

Cable construction

Fibre category	G657.A1
Fiber marking	colour
Tube marking	colour
Strain relief	yes
Armouring	yes

Cable sheath

Material outer sheath	LSZH
Euro Class	B2ca
Colour outer sheath	yellow
Flame retardant	acc. EN 60332-3-24
Halogen free	acc. EN 60754-1/2

Environmental conditions

Temperature Range (Operation)	-25 – 60 °C
Temperature Range (Storage)	-25 – 70 °C
Temperature Range (Installation)	-5 – 50 °C

Standards, approvals, certifications

Cabling standards	EN 50173-1;ISO/IEC 11801
Harmonized standard	EN 50575
Cable & Fiber	IEC 60794-2

Available variants

Article no.	Title	VDE-Name	Construct	Cable Ø	Weight	Bending radius	Tensile Force
56312.1OS2-CPR	INFRALAN® I-B(ZN)BH 12E 9/125μ, G657A1 ,LSZH yellow CPR-B2CA	I-B(ZN)BH 12E 9/125μ	12e (1 x 12) singlemode G.657.A1	6.5 mm	46 kg/km	130 mm	1500 N