

Yoyo - surface mounting

Design: C.F. Møller Architects



Yoyo is a range of elegant interior light fixtures with low height.

CF Møller Architects have created the Yoyo family in the slim and elegant design. Characterised by the parabola finished by distinct profiles at both ends, the Yoyo light fixtures seem floating - a unique and sculptural expression.

Being edge lit, the Yoyo fixtures are free from dots and shadows from other components. They are available with opalised or prismatic shades featuring the diffuse or the directed light.

The height of the Yoyo fixtures is 51 mm, and they are ideal for any application on wall or ceiling, including staircases, corridors, etc.

Types:

For wall or ceiling, uplight/backlight optional
Pendant

Sizes:

Diameter: 225, 350, or 535 mm
Diameter pendant: 535 mm

Finish:

Raw aluminium
Various RAL colours

Lighting:

LED: Edge Lit
Top reflector + light guide plate (LGP)


Yoyo 535 - surface mounting

Design: C.F. Møller Architects



Luminaire specification:

Material:	Cast aluminium
Finish:	Raw aluminium white RAL9010, black RAL9005, alu-grey RAL9006, yellow RAL1032, orange RAL2003, blue-green RAL6004, squirrel grey RAL7000
Shade:	Acrylate (PMMA), opalised or micro prismatic
Mounting:	On ceiling or wall
Connection:	max 2 cables, 5x1.5 mm ² into 5-pole terminal block 2x2.5 mm ²
Classification:	IP20, class I
Weight:	4.1 kg
Lamp type:	LED

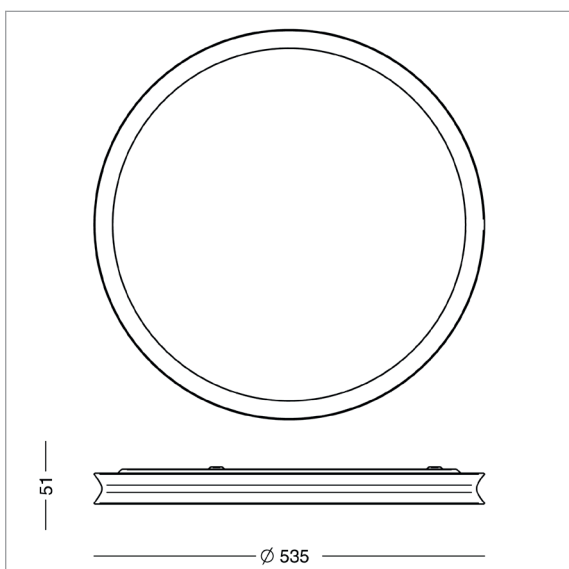

LED and driver specification:

LED:	Edge Lit
Total consumption:	26-36 W
Operational life:	min 50,000 hours at ta 25°C L80B10
Colour temperature:	2700, 3000, or 4000 Kelvin
Colour rendering:	min 90 Ra
Colour accuracy:	3 Steps SDCM
Driver:	500-700 mA, option for dimmable

Product codes:

YOYO 535 - surface mount							
Item No.	Lamp type	Select colour, colour temperature, etc. in the table below.					
2914-	26 W LED, 500 mA						
2915-	36 W LED, 700 mA						
2916-	26 W LED, 500 mA, with uplight						
2917-	36 W LED, 700 mA, with uplight						
Combine with:	Colour	Shade	Colour temperature		Dimming/Control		
	0 raw aluminium	empty	PMMA opalised	927	2700 K, 90 Ra	empty	no dimming
	1 white RAL 9010	M	PMMA micro prismatic	930	3000 K, 90 Ra	D	Dali
	3 black RAL 9005			940	4000 K, 90 Ra		
	19 alu-grey RAL 9006						
	102 yellow RAL 1032						
	103 orange RAL 2003						
	104 blue-green RAL 6004						
	105 squirrel grey RAL 7000						
Example Item No.:	2915-0M930D = Yoyo 535, 36 W, raw aluminium, micro prismatic shade, 3000 K 90 Ra, Dali						


Yoyo 350 - surface mounting

Design: C.F. Møller Architects



Luminaire specification:

Material:	Cast aluminium
Finish:	Raw aluminium white RAL9010, black RAL9005, alu-grey RAL9006, yellow RAL1032, orange RAL2003, blue-green RAL6004, squirrel grey RAL7000
Shade:	Acrylate (PMMA), opalised or micro prismatic
Mounting:	On ceiling or wall
Connection:	max 2 cables, 5x1.5 mm ² into 5-pole terminal block 2x2.5 mm ²
Classification:	IP20, class I
Weight:	2.1 kg
Lamp type:	LED

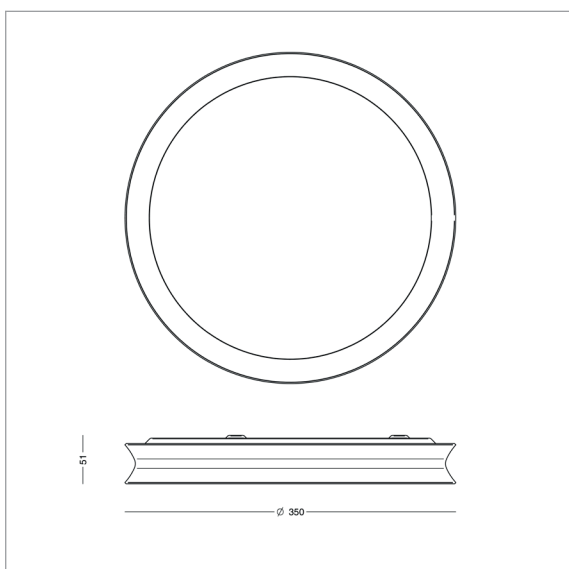

LED and driver specification:

LED:	Edge Lit
Total consumption:	16-23 W
Operational life:	min 50,000 hours at ta 25°C L80B10
Colour temperature:	2700, 3000, or 4000 Kelvin
Colour rendering:	min 90 Ra
Colour accuracy:	3 Steps SDCM
Driver:	500-700 mA, option for dimmable

Product codes:

YOYO 350 - surface mount							
Item No.	Lamp type		Select colour, colour temperature, etc. in the table below.				
2911-	16 W LED, 500 mA						
2910-	23 W LED, 700 mA						
2913-	16 W LED, 500 mA, with uplight						
2914-	23 W LED, 700 mA, with uplight						
Combine with:	Colour	Shade		Colour temperature		Dimming/Control	
	0 alu w. coating	empty	PMMA opalised	927	2700 K, 90 Ra	empty	no dimming
	1 white RAL 9010	M	PMMA micro prismatic	930	3000 K, 90 Ra	D	Dali
	3 black RAL 9005			940	4000 K, 90 Ra		
	19 alu-grey RAL 9006						
	102 yellow RAL 1032						
	103 orange RAL 2003						
	104 blue-green RAL 6004						
	105 squirrel grey RAL 7000						
Example Item No.:	2910-1M930 = Yoyo 350, 23 W, white, micro prismatic shade, 3000 K 90 Ra, no dimming						


Yoyo 225 - surface mounting

Design: C.F. Møller Architects



Luminaire specification:

Material:	Cast aluminium
Finish:	Raw aluminium white RAL9010, black RAL9005, alu-grey RAL9006, yellow RAL1032, orange RAL2003, blue-green RAL6004, squirrel grey RAL7000
Shade:	Acrylate (PMMA), opalised or micro prismatic
Mounting:	On ceiling or wall
Connection:	max 2 cables, 5x1.5 mm ² into 5-pole terminal block 2x2.5 mm ²
Classification:	IP20, class I
Weight:	1.2 kg
Lamp type:	LED

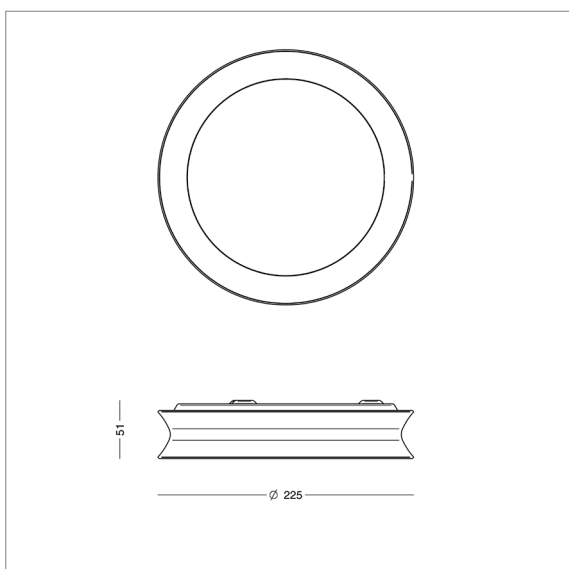

LED and driver specification:

LED:	Edge Lit
Total consumption:	10-14 W
Operational life:	min 50,000 hours at ta 25°C L80B10
Colour temperature:	2700, 3000, or 4000 Kelvin
Colour rendering:	min 90 Ra
Colour accuracy:	3 Steps SDCM
Driver:	500-700 mA, option for dimmable

Product codes:

YOYO 225 - surface mount							
Item No.	Lamp type	Select colour, colour temperature, etc. in the table below.					
2919-	10 W LED, 500 mA						
2918-	14 W LED, 700 mA						
2921-	10 W LED, 500 mA, with uplight						
2920-	14 W LED, 700 mA, with uplight						
Combine with:	Colour	Shade		Colour temperature		Dimming/Control	
	0 alu w. coating	empty	PMMA opalised	927	2700 K, 90 Ra	empty	no dimming
	1 white RAL 9010	M	PMMA micro prismatic	930	3000 K, 90 Ra	D	Dali
	3 black RAL 9005			940	4000 K, 90 Ra		
	19 alu-grey RAL 9006						
	102 yellow RAL 1032						
	103 orange RAL 2003						
	104 blue-green RAL 6004						
	105 squirrel grey RAL 7000						
Example Item No.:	2919-3M927 = Yoyo 225, 10 W, black, micro prismatic shade, 2700 K 90 Ra, no dimming						