

ULTIMA-P

Where light meets design



LED LINEAR™

A Fagerhult Group Company

ULTIMA-P IP40

DISCRETE AND MINIMALIST

- ⊖ LINEAR
- ⊕ MODULAR
- ∞ INFINITE

- ULTIMA-P represents the perhaps most unobtrusive and minimal pendant luminaire yet packing a powerful punch.
- For a wide range of task lighting applications, but also as an almost invisible design luminaire, ULTIMA-P is ideal above counters in hotel receptions, bars, but also for work desks as well as smaller tables in meeting rooms. The elegant brown leather loops perfectly complement the material mix of the luminaire made of extruded and anodized aluminum profile embedded in a stainless steel housing, available in different colors.
- The luminaire as a member of the ULTIMA family features 3 master technologies (CSP LEDs, antiglares and the second generation of nano optics). ULTIMA-P is offering 4 different beam angles (40°, 60°, Batwing and opal) with great glare control and color consistency integrated in a height of just 12 mm - available in 2 standard lengths.

KEY FEATURES

Minimal pendant luminaire




With a cross section of 16.2 mm x 12 mm it is extremely small for a pendant luminaire, especially when considering the built-in optical technology and an output of up to 1,840 lm/m.



NanoRay 2.0 optics offer precise beam and glare control with minimal color over angle.



ULTIMA-P offers multiple variations like 40° and 60° optics with low glare to illuminate the entire workplace. The batwing optic allows even illumination of a larger surface (e.g. two adjacent desks), giving the ULTIMA-P an additional advantage. The 6 different housing/anti-glare color combinations increase the versatility of the luminaire.




The elegant leather loops add a design touch to the luminaire and work place.

TECHNICAL DATA

- Lumen output: up to 1,840 lm/m
- Color temperature between 2,700 K and 4,000 K
- CRI 95
- IP40
- Lengths: 1,092 mm and 1,592 mm
- Lifetime 60,000 h



NANO optics





40° 60° Batwing

Opal




Opal

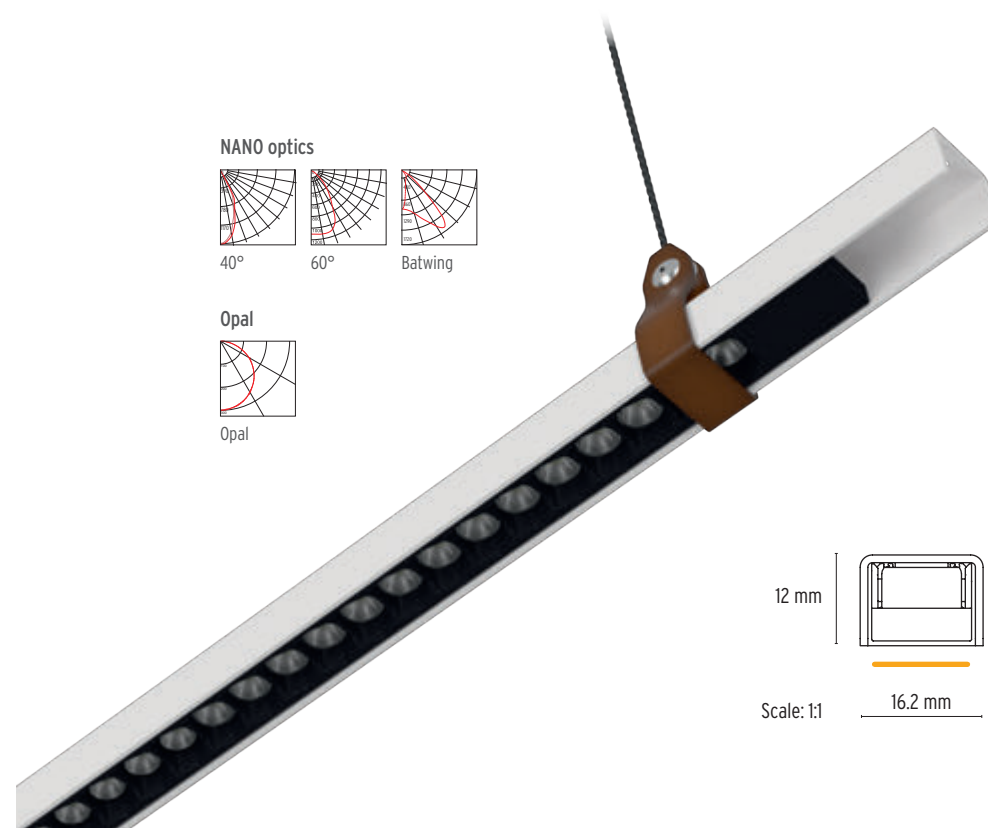

Scale: 1:1

MOUNTING



PENDANT FALSE / CONCRETE CEILING

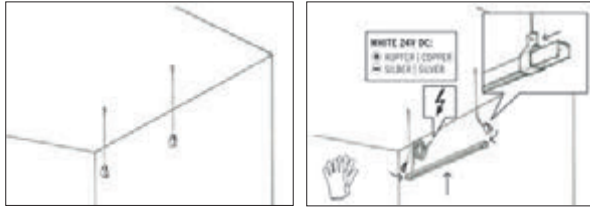


GRID CEILING



BOTH PENDANT VARIANTS

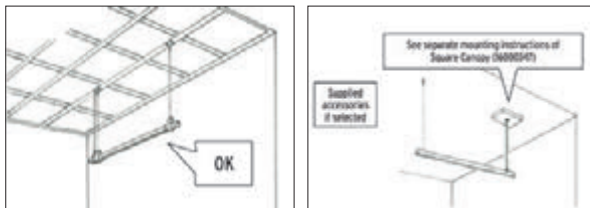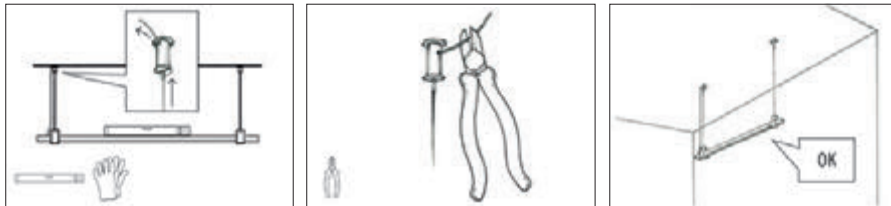

OPTIONAL ACCESSORY

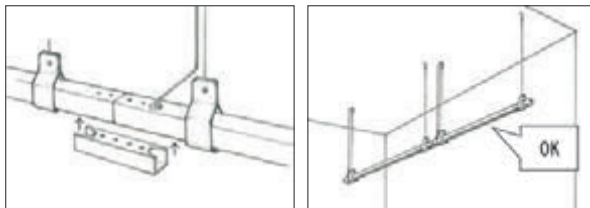

Please see our detailed mounting instructions on the website www.led-linear.com

REFERENCES



The elegant leather loops wrap around the profile of ULTIMA-P and offer a very special design feeling.



The ant glare ensures a low glare, so that the light source remains hidden. The luminaire is hardly perceptible in the room and perfectly illuminates the workplace.

MULTIPLE OPTIONS FOR POWER & CONTROLS

The following accessories are included with the luminaire if chosen as part of the order code.

1a. Surface mounted canopy with driver*



PSU option "C" in order code
VarioCANOPY Square Mounting set (optional) for pendant ceiling installations on concrete ceilings (suitable for all countries except North America)

1b. External driver*



PSU option "E" in order code
VarioPSU 24V/35W IP20, 100-277 V (suitable for all countries except North America)

2a. CASAMBI



Control option "C" in order code
IN.finite CASAMBI 2CH CV

2b. DALI DT-6



Control option "D" in order code
IN.finite DALI DT6 2CH CV

* If PSU option "C" or "E" was chosen as part of order code, no further accessories are required to install and operate the luminaire.

LED LINEAR™

A Fagerhult Group Company

Please scan the QR Code for
more detailed information
about ULTIMA-P IP40



LED Linear™ GmbH
Dr. Alfred-Herrhausen-Allee 20
47228 Duisburg
Germany
Phone +49 (0) 2065 94322-100
Fax +49 (0) 2065 94322-120
Info@led-linear.com

www.led-linear.com



Art.-#: 3300037-ENG - Edition 04/2021 - All rights reserved. Subject to change.