



Step Up Slim

Specification Sheet





UL STD 1598 IP67

LUMINAIRE FEATURES

Design and Application

- Architectural and landscape lighting
- Recessed floor installation
- Gravel, soil or concrete
- UL STD 1598, IP67, Wet location, drive over rated 3000 kg (6600lb)

Performance

- IK10, Tempered glass, crystal clear
- Continuous run of standard lengths
- Remote power supply
- Stainless steel type 304 body
- Snap in installation with no exposed hardware
- Galvanic current protection (installation housing)
- Lifetime TM-21@85C L90(9K)=60500h
- Supplied with oil and water resistant 1m (3,3') feed cable as standard
- CRI: > 85
- 2 Step MacAdam

Safety

- Remote power supply
- Low voltage operation
- Recessed installation

Sustainabilty

• Recyclable material

Installation housing

- SL315 401mm (15,8")
- SL317 1001mm (39,4")


Accessories


• 200886 - Removal tool

Power suplies

- List of proposed power supplies that are to be ordered separately.
- Click <u>here</u> for list of available drivers.
- Click <u>here</u> for voltage drop and distances.

FILIX









Step Up Slim ORDERING INFORMATION

| MODEL | |
|-------------|---|
| SL | |
| LENGHT | |
| 400 | • 15,8" (400mm) |
| 1000 | • 39,4" (1000mm) |
| POWER | |
| L | • L - 10W/m, 2700K - 3000K, 150lm |
| н | • H - 23W/m,2700K - 3000K, 300lm |
| | • H - 32W/m RGBW (W 3000K) |
| COLOR TEMP. | |
| 27 | • 27 - 2700K |
| 30 | • 30 - 3000K |
| RGBW | • RGBW (W 3000K) |
| OPTICS | |
| LL | • LL = 120° even illumination |
| VOLTAGE | |
| 24 | • 24 - 24VDC fixture voltage |
| OPTIONS | |
| 3 | • 3 - luminaire supplied with 3m (10') feed cable |
| 6 | • 6 - luminaire supplied with 6m (20') feed cable |
| 9 | • 9 - luminaire supplied with 9m (30') feed cable |
| | |








Step Up Slim INSTALATION DETAILS

Installation housing - SL315 / SL317

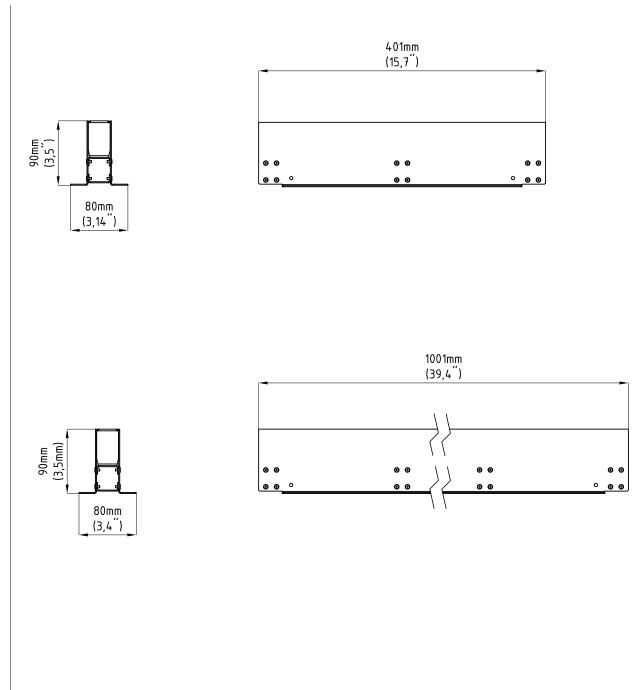

Note:

For details on specific depths, tiling thickness and other please refer to both Installation instructions for fixture and housing.