



iCANnet Cable

For the installation of iLight Control Systems

Specification

Power

- Conductor: 18 AWG, tinned copper
- Insulation: Polyethylene
- Colour code: Red & black

Data

- Conductor: 22 AWG, tinned copper
- Insulation: Polyethylene
- Screen: Aluminium foil
- Drain wire: Tinned copper
- Colour code: White & blue

Overall


- Jacket: Low smoke halogen free
- Colour: Blue
- Overall diameter: 6.35mm (nominal)
- Cable drum size: 300m
- Drum weight: 19.5Kg

Technical

- DC resistance conductor 22AWG: $\leq 54.20 \Omega/\text{km}$ @ 20°C
- DC resistance conductor 18AWG: $\leq 23.70 \Omega/\text{km}$ @ 20°C
- Operating Voltage: 300V
- Capacitance Core to Core 22AWG: 46pF/m
- Capacitance Core to Core 18AWG: 95pF/m
- Inductance Core 22AWG: 0.76µH/m
- Inductance Core 18AWG: 0.55µH/m

Overview

iCANnet Network Cable is specifically designed to connect between each device on an iLight control system. The cable consists of 2 x 18 AWG tinned copper wire with PE Insulation (Power pair) and 2 x 22 AWG screened tinned copper wire with PE Insulation (data pair). There is also a tinned copper drain wire in contact with the aluminium foil screen. The cable is sheathed overall in LSZH.

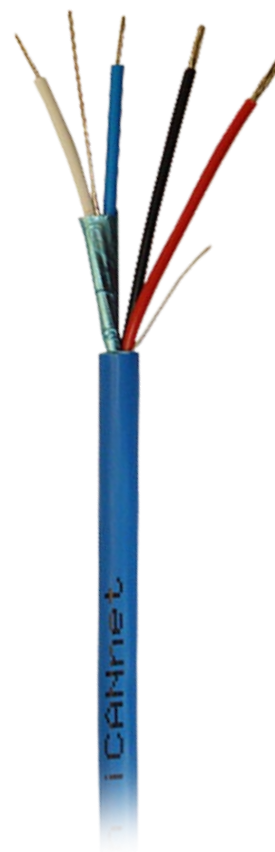

Function	Network Cable Colours
0V	Black
CAN L	Blue
Shield	Silver
CAN H	White
+VDC	Red

Contact Us

+44 (0)1923 495495

enquiries@iLight.co.uk

www.iLight.co.uk

iLight

A brand of Signify
Usk House, Llantarnam Park
Cwmbran, NP44 3HD, UK

Changes to the products, to the information contained in this document, and to prices are reserved, so are errors and omissions.

© 2022 Signify Holding
All Rights Reserved

iLight is a registered trademark.
All other trademarks are property of their respective owners.

iCANnet Cable Rev6 1121



FM 727924