


Cable reference	Part number	R809800
	Source code	M
	R&M positioning	Cat.7 _A , Level 1

Cable construction	Conductor	Bare solid copper wire AWG23 (≥ Ø 0.58 mm)
	Insulation	Polyethylene ≤ Ø 1.47 mm
	Twisting	2 wires to the pair
	Cable lay up	4 pairs to the core
	Pair screen	Alu / polyester tape
	Overall screen	Copper braid (nom. 30 % coverage)
	Sheath	LSZH, gray RAL 7035

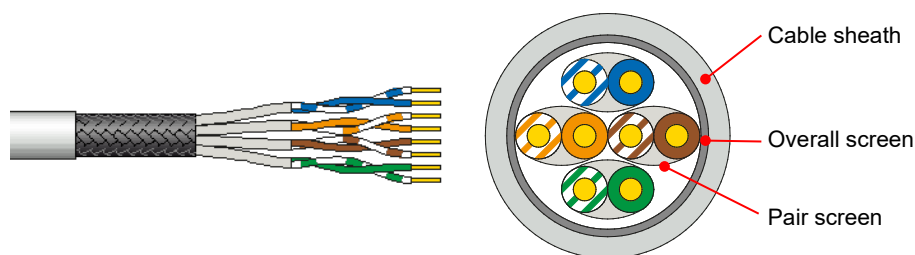

Application
 Primary (Campus), Secondary (Riser), Tertiary (Horizontal)
 IEEE 802.3an: 10Base-T; 100Base-TX; 1000Base-T; 10GBase-T
 IEEE 802.5 16 MB; ISDN; TPDDI; ATM
 IEEE 802.3af / IEEE 802.3at / IEEE 802.3bt
 Confirming to European regulation "CPR" EN 50575

Standards
 ISO/IEC 11801 2nd ed.; EN 50173-1
 IEC 61156-5; Power over Ethernet (PoE) / Type 1-4

Fire rating
 LSZH
 IEC 60332-1-2; IEC 60754-1; IEC 60754-2; IEC 61034
 EN50575; Dca-s1,d2,a1; DOP C7515

Technical Data	Cable designation	S/FTP Cat.7 _A 1200MHz 4PxAWG23
	Packaging	Drum 500 m
	Outer diameter	Nominal 7.50 mm
	Weight	55 kg / km
	Thermal load	583 MJ / km
	Segregation class	d
	Tensile force	100 N

Mechanical Properties	Bending radius	≥ 30 mm during operation (without load)
		≥ 60 mm during installation (with load)
	Temperature range	During operation
	During installation	0°C...+ 50°C

Electrical Properties (at 20°C ± 5°C)





DC loop resistance		≤ 14.6 Ω / 100 m
Resistance unbalance		≤ 2 %
Test voltage	DC, 1 min, core/core	1000 V
Insulation resistance	500 V	≥ 5000 MΩ * km
Capacitance		50 pF / m nom.
Capacitance unbalance		≤ 1.6 pF / m
Mean characteristic impedance @ 100 MHz		100 ± 5 Ω
Nominal velocity of propagation		Approx. 78 %
Propagation delay	At 1 MHz	≤ 538 ns / 100 m
Delay skew		≤ 25 ns / 100 m
Coupling attenuation		≥ 85 dB Type 1
Transfer impedance	At 1 MHz	≤ 8 mΩ / m Grade 1
	At 10 MHz	≤ 8 mΩ / m
	At 100 MHz	≤ 20 mΩ / m
Balance TCL	At 1 MHz	≥ 50 dB Level 2
	At 10 MHz	≥ 40 dB
	At 100 MHz	≥ 30 dB

Typical transmission characteristics (at 20°C)

f (MHz)	Attenuation (dB/100m)		NEXT (dB)		PS-NEXT (dB)		ACR-F ¹⁾ (dB/100m)		PS-ACR-F ¹⁾ (dB/100m)		Return loss (dB)	
	Max	Typ	Min	Typ	Min	Typ	Min	Typ	Min	Typ	Min	Typ
4	3.6	3.5	78	100	75	97	78	90	75	87	23	26
10	5.7	5.4	78	100	75	97	74	90	71	87	25	28
20	8.1	7.6	78	100	75	97	68	85	65	82	25	28
62.5	14.5	14	75	100	72	97	58	83	55	81	21.5	28
100	18.5	17.5	72	100	69	97	54	79	51	76	20.1	26
250	30.2	28.5	66	92	63	89	46	71	43	68	17.3	24
500	44.1	41.3	65	89	62	86	40	62	37	59	17.3	21
600	48.9	44.5	61	87	58	84	38	58	35	55	17.3	19
1000	-	59	-	85	-	82	-	54	-	51	-	18
1200	-	65.5	-	83	-	80	-	51	-	48	-	18

¹⁾ ACR-F was formerly known as ELFEXT.

Recommended connection technique

Module		Perm. Link Class D	Perm. Link Class E	Channel Class E _A	Perm. Link Class E _A	Short Link Class E _A
	Cat.5e/s	✓	-	-	-	-
	Cat.6/s	✓	✓	✓	-	-
	Cat.6 _A /s	✓	✓	✓	✓	✓
	Cat.6 _A EL/s	✓	✓	✓	✓	✓