




X-LINE G/K LED CONNECTOR L

Recessed luminaires



The group of X-line luminaires is made of aluminum profile with opal diffuser or micro-prismatic diffuser. The luminaires may be joined with special connectors providing great freedom in arranging elements of the system and its functionality.

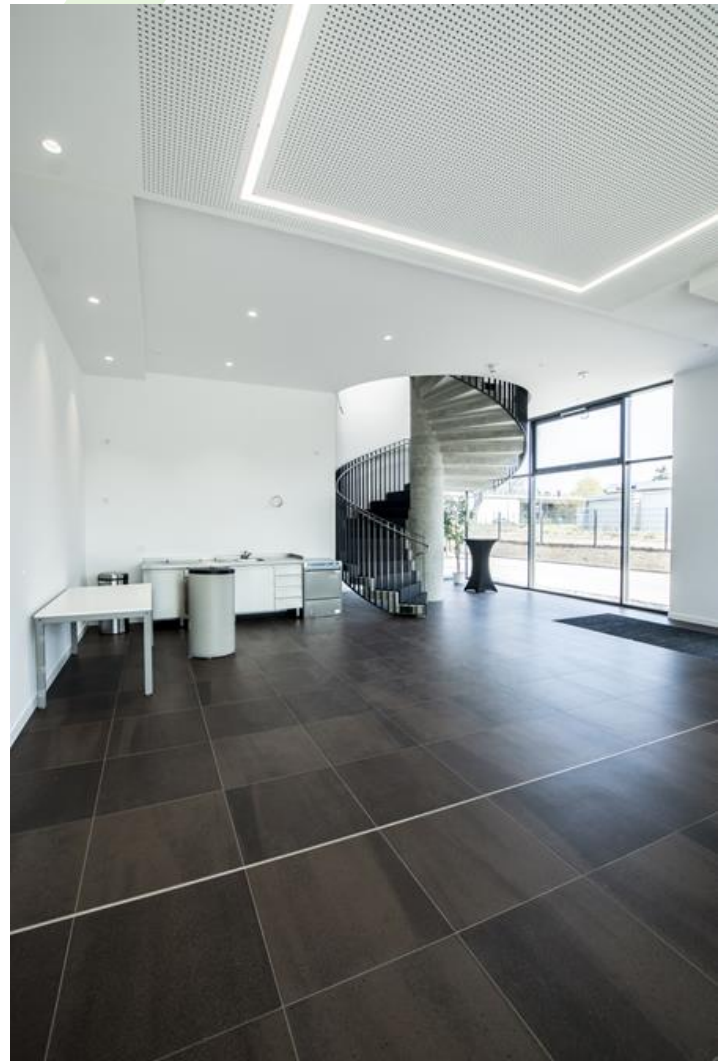

Grimm, Berlin


Pictograms:



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-LINE G/K LED 1950	2022 / 2130	13	3000 / 4000	603/323 x 80 x 134
X-LINE G/K LED 2600	2698 / 2840	17	3000 / 4000	603/603 x 80 x 134
X-LINE G/K LED 3300	3309 / 3483	21	3000 / 4000	603/323 x 80 x 134
X-LINE G/K LED 4400	4410 / 4644	28	3000 / 4000	603/603 x 80 x 134

Technical drawing:

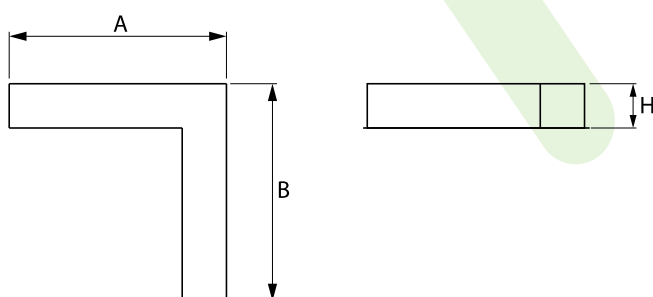

Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
CRI	>80
SDCM	3
Operating temperature range [°C]	5 ÷ 30
Driver	standard (E) DIM DALI (EDD) *

* Variant to specify when ordering

Mechanical features:

Material	aluminum
Color	anodised aluminum
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA) PLX (PMMA opal)

Note: The power shown refers to the whole system (tolerance +/- 10%).

Specifications are subject to change. Pictures of the luminaires may differ from reality.
Date of last update: 25-03-2020