


DATASHEET

ECOLAN® RJ45 Keystone UTP, Cat.6, 250MHz, components certified

Article no.

E-20080

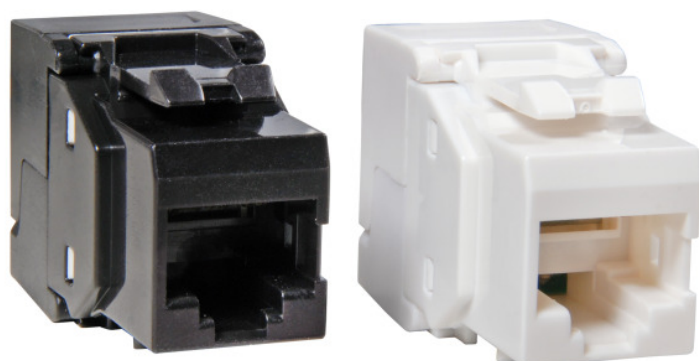

ECOLAN®



Description

Specifications:

Cat.6 de-embedded zertifiziert (DELTA) acc. to ISO 11801 2nd Edition 2002
 PoE Plus acc. to IEEE 802.3at
 Plastic housing PC+ABS
 Compact cable presorter for AWG 24/1 .. 22/1 and AWG 26/7 .. AWG 24/7
 Max. cable diameter: 8,5mm
 Pair management according to TIA 568A /B colour codes
 PoE and PoE Plus according to IEEE802.3af/at
 Appropriate for distribution panels and frames with keystone slots, not for UAE
 Strain relief via cable tie

Scope of delivery:

1 x RJ45 keystone, 1 x hinged dust cover, 1 x cable tie, 1 x mounting instruction

General data

| | |
|-----------------------------------|-------------|
| Category | 6 |
| Model | jack (jack) |
| Connection type | LSA |
| Type of connector | RJ45 8(8) |
| Screened | False |
| AWG-range for litz wire conductor | 26 - 24 |
| AWG-range for solid core | 24 - 22 |
| Special tool necessary | False |
| Suitable for round cable | True |
| Suitable for flat cable | False |
| Suitable for litz wire conductor | True |
| Suitable for solid core | True |
| Complaint to UL94 | V-0 |

This datasheet was created automatically on 14-02-2019 . Technical changes reserved.



DATASHEET

ECOLAN® RJ45 Keystone UTP, Cat.6, 250MHz, components certified

Article no.

E-20080

Standards, approvals, certifications

4PPOE certified

True

Available variants

| Article no. | Title | Colour |
|-------------|--|--------|
| E-20080 | ECOLAN® RJ45 Keystone UTP, Cat.6, component certified, white | white |
| E-20081 | ECOLAN® RJ45 Keystone UTP, Cat.6, component certified, black | black |

This datasheet was created automatically on 14-02-2019 . Technical changes reserved.

